

Light Division, official UK partner of Modular Lighting Instruments
T +44 20 8068 6832 | E modular@supermodular.uk | W www.supermodular.com

OUTPUT*	48: UP TO 312LM - UP TO 4.4W 82: UP TO 744LM - 7.2W 115: UP TO 1461LM - 16.2W / 9.2W (ADJ.) 160: UP TO 4031LM - 41.8W
CCT	2700K, 3000K, 3500K, 4000K, 1800 - 3000K (WARM DIM)

*OUTPUT FOR SMART KUP, WHITE STRUC, 2700K

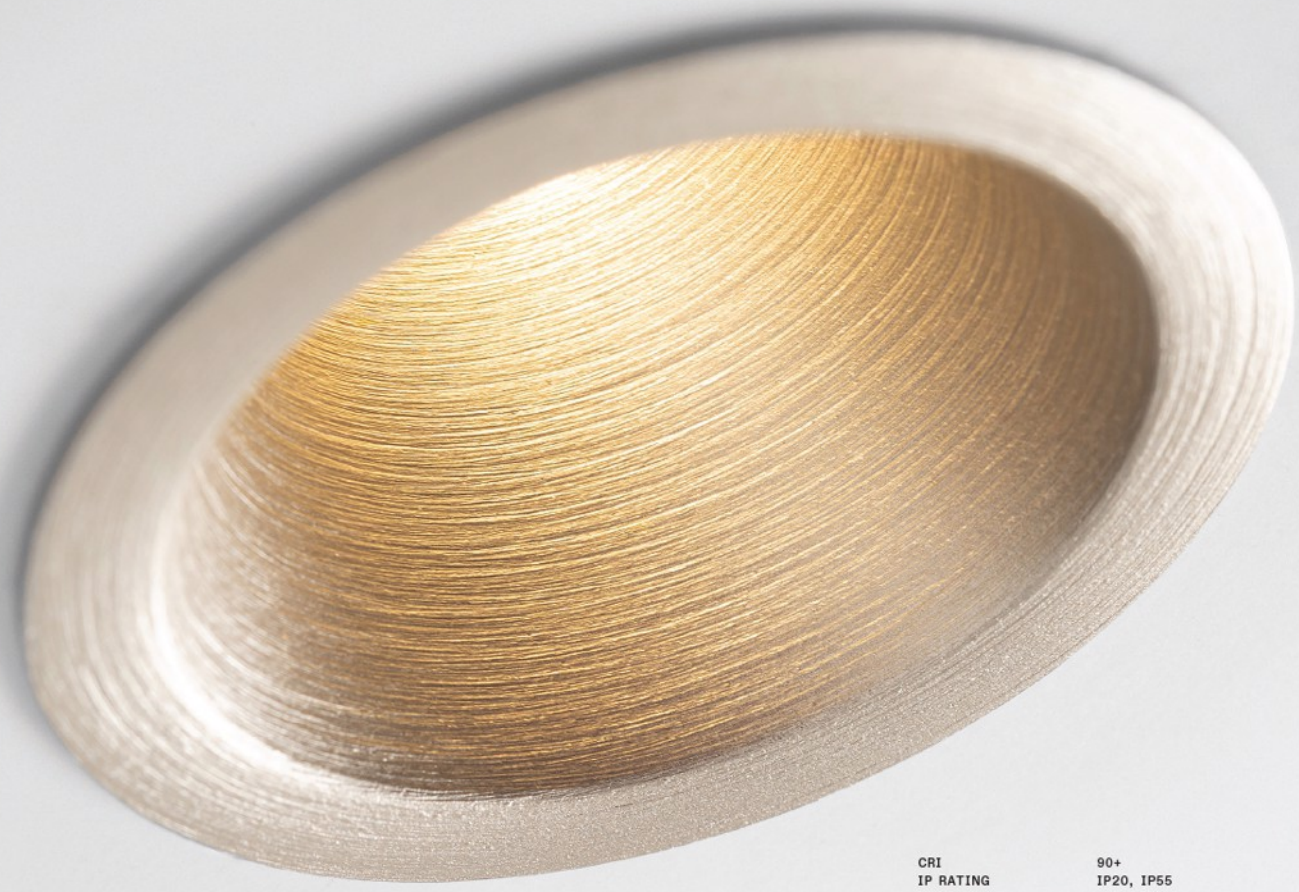

CRI	90+
IP RATING	IP20, IP55
BEAM ANGLE	10° - 50°
ADJUSTABILITY*	H 355° V 25°

*ADJUSTABILITY FOR SMART ADJUSTABLE

DISCOVER MORE



SMART KUP RECESSED ADJUSTABLE 82 - BRUSHED CHAMPAGNE



SMART CAKE RECESSED 48 - BRUSHED BLACK



SMART KUP RECESSED 48 - BRUSHED BRONZE



SMART LOTIS ADJUSTABLE 82 - WHITE STRUCTURE



SMART LOTIS 82 - BLACK STRUCTURE


SMART LOTIS RECESSED



SMART LOTIS RECESSED ADJUSTABLE 82 - BRUSHED BRONZE



SMART LOTIS ASY RECESSED 84 - BRUSHED BRONZE

CONTACT

MODULAR LIGHTING INSTRUMENTS - HEADQUARTERS

Armoedestraat 71 – 8800 Roeselare – Belgium
+32 (0) 51 26 56 56 – welcome@supermodular.com
www.supermodular.com

PARTNER NETWORK - WHERE TO BUY

DISCOVER OUR NEWEST PRODUCTS

© Modular Lighting Instruments - all rights reserved

Modular Lighting Instruments reserves the right to alter material, dimensions and characteristics without prior notice. This catalogue replaces all previous catalogues. Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the catalogue and the legend. Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Modular Lighting Instruments. You can obtain a copy of these conditions on demand.

For latest information and specifications of the full Modular Lighting Instruments range visit **www.supermodular.com**

MODULAR
LIGHTING INSTRUMENTS