

Light Division, official UK partner of Modular Lighting Instruments
T +44 20 8068 6832 | E modular@supermodular.uk | W www.supermodular.com



OUTPUT*	UP TO 595LM - UP TO 8.5W
CCT	2700K, 3000K

*OUTPUT FOR THIMBLE RECESSED,
WHITE STRUC, 2700K

74 MM

85 MM

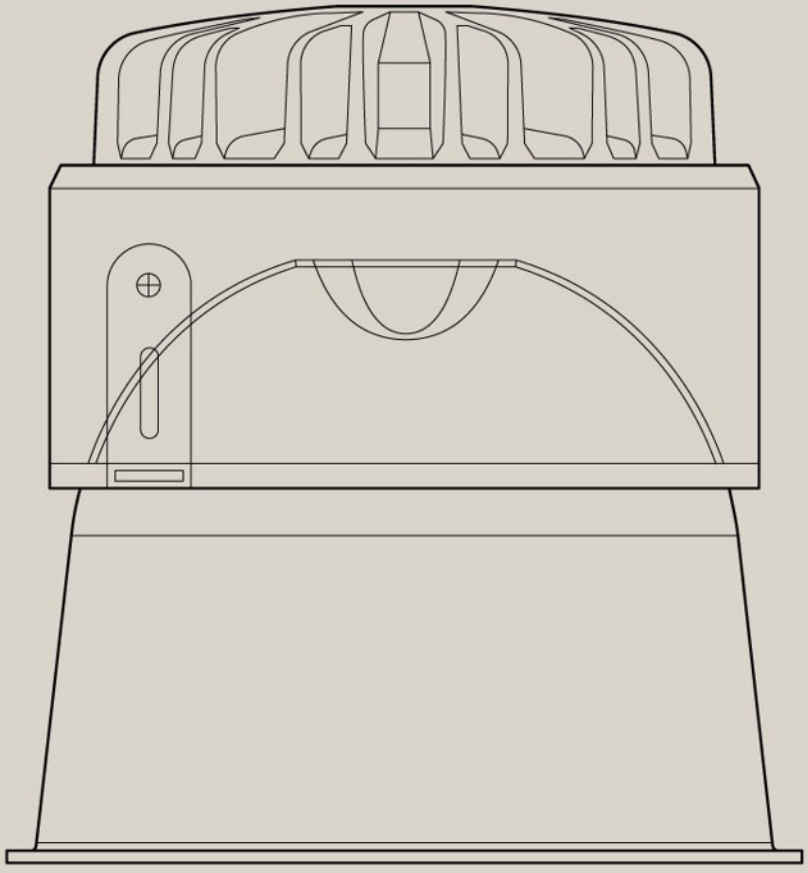

CRI	90+
IP RATING	IP20, IP55
BEAM ANGLE	10° - 30°
AJUSTABILITY*	H 360° V 30°

*ADJUSTABILITY FOR THIMBLE RECESSED ADJUSTABLE 74,
THIMBLE RECESSED TRIMLESS ADJUSTABLE 70

DISCOVER MORE

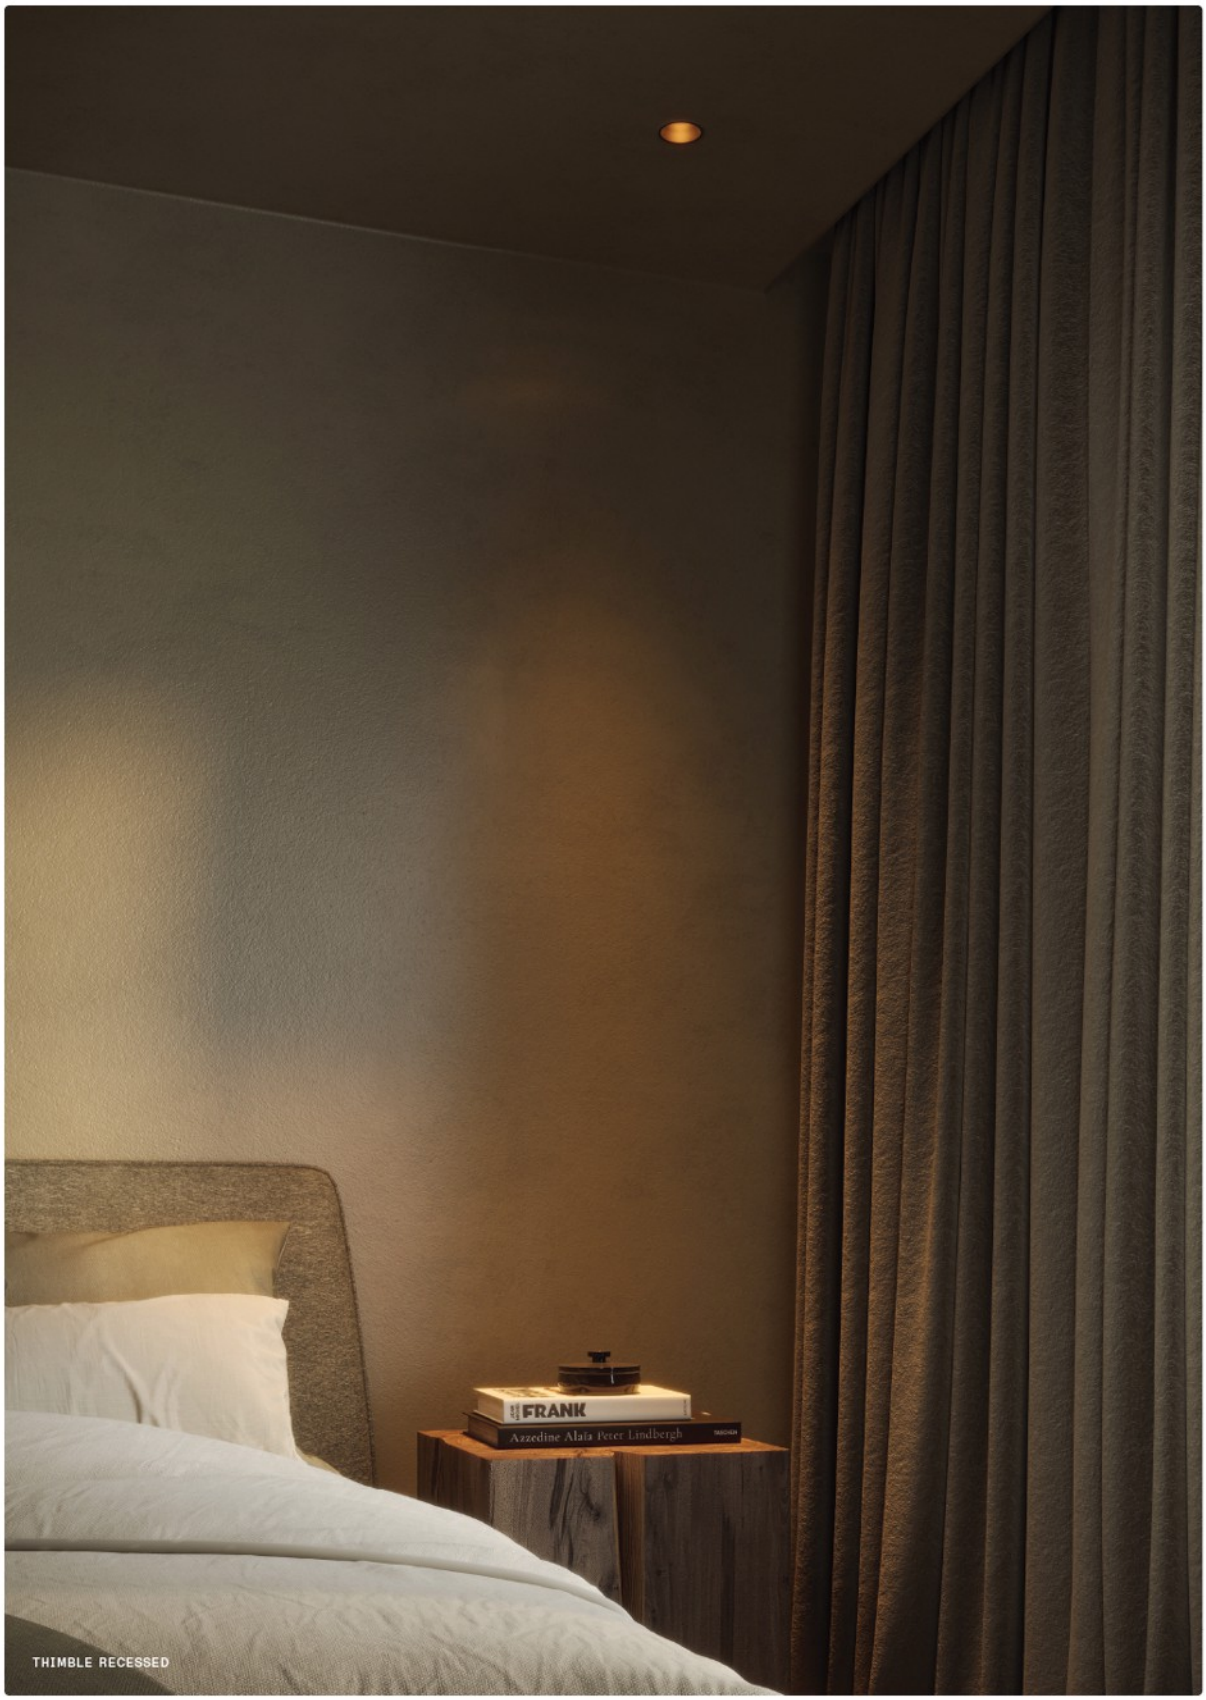

THIMBLE RECESSED



THIMBLE RECESSED TRIMLESS ADJUSTABLE 70 - BRUSHED ANODISED CHAMPAGNE



THIMBLE RECESSED 74:
BLACK STRUCTURE / WHITE STRUCTURE /
BRUSHED ANODISED SILVER BRONZE / BRUSHED ANODISED CHAMPAGNE /
BRUSHED ANODISED GOLD / BRUSHED ANODISED BRONZE / BRUSHED ANODISED BLACK



THIMBLE RECESSED TRIMLESS 70 - WHITE STRUCTURE



THIMBLE RECESSED







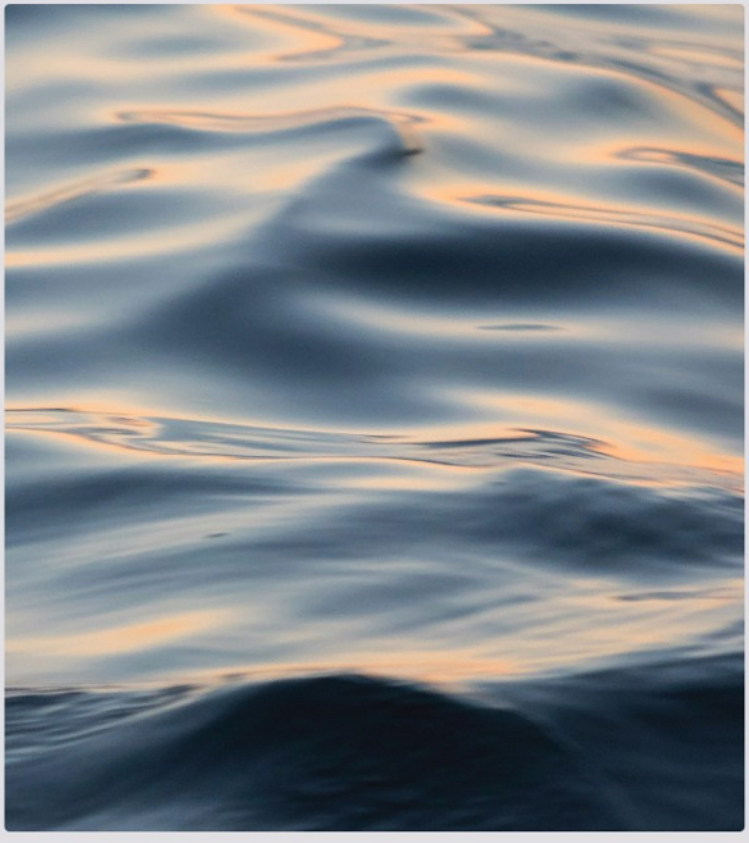

Flow
Reflection
Contrast
Serenity
Quiet statement

CONTACT

MODULAR LIGHTING INSTRUMENTS - HEADQUARTERS

Armoedestraat 71 – 8800 Roeselare – Belgium
+32 (0) 51 26 56 56 – welcome@supermodular.com
www.supermodular.com

PARTNER NETWORK - WHERE TO BUY

DISCOVER OUR NEWEST PRODUCTS

© Modular Lighting Instruments - all rights reserved

Modular Lighting Instruments reserves the right to alter material, dimensions and characteristics without prior notice. This catalogue replaces all previous catalogues. Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the catalogue and the legend. Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Modular Lighting Instruments. You can obtain a copy of these conditions on demand.

For latest information and specifications of the full Modular Lighting Instruments range visit **www.supermodular.com**

MODULAR
LIGHTING INSTRUMENTS